
Uncoil new thermostat wire and follow existing wire back into range



Thermostat enters oven cavity thru hole in back left corner of range.

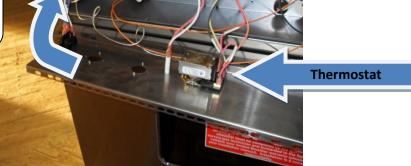

Thermostat probe is secured to back of cavity by 2 clips that can be removed by squeezing