

# ALUMINUM CAM-LOCKS

Our aluminum cam-locks are manufactured from aluminum alloy 384 (JIS grade ADS12) and feature type 316 stainless pins, forged brass handles, and plated steel finger rings. G65 couplings fit Commercial Item Description (CID) #A-A-59326B for sizes 3/4" to 6" and will interchange with other couplings that meet this specification. No government standard has been established for 1/2", 8" and 10" so different manufacturers' couplings may not interchange in this size. Female couplers are supplied with locking clips.

Aluminum working pressures:

1/2" to 2"	250 psi
2 1/2" to 4"	150
5" & 6"	75
8"	50
10"	50

Standard gaskets are rated to 105°C (221°F)


**Part No.      Size      IMPA Code      PRICE EACH**

**G65A... PART A FEMALE NPT ADAPTER**


G65A-050	1/2"	35-17-01		\$ 3.50
G65A-075	3/4"	35-17-02		3.50
G65A-100	1"	35-17-03		3.60
G65A-125	1 1/4"	35-17-04		4.70
G65A-150	1 1/2"	35-17-05		4.30
G65A-200	2"	35-17-06	5.10	
G65A-250	2 1/2"	35-17-07	9.10	
G65A-300	3"	35-17-08	9.20	
G65A-400	4"	35-17-09	15.00	
G65A-500	5"	35-17-10	34.90	
G65A-600	6"	35-17-11	33.20	
G65A-800	8"	35-17-12	158.60	
G65A-1000	10"		357.30	

**Part No.      Size      IMPA Code      PRICE EACH**

**G65D... PART D FEMALE NPT COUPLER**

G65D-050	1/2"	35-18-01		\$ 7.60
G65D-075	3/4"	35-18-02		8.10
G65D-100	1"	35-18-03		8.70
G65D-125	1 1/4"	35-18-04		11.60
G65D-150	1 1/2"	35-18-05		10.80
G65D-200	2"	35-18-06	11.60	
G65D-250	2 1/2"	35-18-07	18.00	
G65D-300	3"	35-18-08	20.00	
G65D-400	4"	35-18-09	28.20	
G65D-500	5"	35-18-10	54.30	
G65D-600	6"	35-18-11	59.30	
G65D-800	8"	35-18-12	292.50	
G65D-1000	10"		578.90	


**G65B... PART B MALE NPT COUPLER**

G65B-050	1/2"	35-18-51		7.10
G65B-075	3/4"	35-18-52		8.00
G65B-100	1"	35-18-53		9.00
G65B-125	1 1/4"	35-18-54		11.20
G65B-150	1 1/2"	35-18-55		11.20
G65B-200	2"	35-18-56	11.80	
G65B-250	2 1/2"	35-18-57	17.10	
G65B-300	3"	35-18-58	19.90	
G65B-400	4"	35-18-59	27.20	
G65B-500	5"	35-18-60	62.80	
G65B-600	6"	35-18-61	60.40	
G65B-800	8"	35-18-62	307.70	
G65B-1000	10"		578.90	


**G65E... PART E HOSE SHANK ADAPTER**

G65E-050	1/2"			3.90
G65E-075	3/4"	35-19-01		3.70
G65E-100	1"	35-19-02		4.20
G65E-125	1 1/4"	35-19-03		5.50
G65E-150	1 1/2"	35-19-04		5.30
G65E-200	2"	35-19-05	6.70	
G65E-250	2 1/2"	35-19-06	11.40	
G65E-300	3"	35-19-07	13.40	
G65E-400	4"	35-19-08	22.20	
G65E-500	5"	35-19-09	48.50	
G65E-600	6"	35-19-10	54.30	
G65E-800	8"	35-19-11	189.50	
G65E-1000	10"		474.10	

**G65C... PART C HOSE SHANK COUPLER**

G65C-050	1/2"			6.30
G65C-075	3/4"			6.50
G65C-100	1"	35-20-01		7.40
G65C-125	1 1/4"	35-20-02		10.60
G65C-150	1 1/2"	35-20-03		10.50
G65C-200	2"	35-20-04	12.30	
G65C-250	2 1/2"	35-20-05	17.40	
G65C-300	3"	35-20-06	20.80	
G65C-400	4"	35-20-07	27.60	
G65C-500	5"	35-20-08	65.60	
G65C-600	6"	35-20-09	64.00	
G65C-800	8"	35-20-10	296.10	
G65C-1000	10"	35-20-11	762.70	


**G65F... PART F MALE NPT ADAPTER**


G65F-050	1/2"	35-17-51		4.40
G65F-075	3/4"	35-17-52		4.50
G65F-100	1"	35-17-53		4.90
G65F-125	1 1/4"	35-17-54		6.60
G65F-150	1 1/2"	35-17-55		5.70
G65F-200	2"	35-17-56	6.90	
G65F-250	2 1/2"	35-17-57	11.80	
G65F-300	3"	35-17-58	13.30	
G65F-400	4"	35-17-59	21.50	
G65F-500	5"	35-17-60	48.80	
G65F-600	6"	35-17-61	49.50	
G65F-800	8"	35-17-62	205.00	
G65F-1000	10"		389.70	

**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.


# ALUMINUM CAM-LOCKS


Cam-locks & Fuel


Part No.	Size	IMPA Code	PRICE EACH
<b>G65DC... PART DC DUST CAP</b>			
			
G65DC-050	1/2"		\$ 6.00
G65DC-075	3/4"	35-20-51	6.90
G65DC-100	1"	35-20-52	7.80
G65DC-125	1 1/4"	35-20-53	10.50
G65DC-150	1 1/2"	35-20-54	9.40
G65DC-200	2"	35-20-55	10.60
G65DC-250	2 1/2"	35-20-56	14.10
G65DC-300	3"	35-20-57	17.00
G65DC-400	4"	35-20-58	24.30
G65DC-500	5"	35-20-59	44.10
G65DC-600	6"	35-20-60	51.50
G65DC-800	8"	35-20-61	241.00
G65DC-1000	10"		531.00

Part No.	Size	IMPA Code	PRICE EACH
<b>G65DP... PART DP DUST PLUG</b>			
			
G65DP-050	1/2"		\$ 3.10
G65DP-075	3/4"	35-19-51	3.00
G65DP-100	1"	35-19-52	3.60
G65DP-125	1 1/4"	35-19-53	4.30
G65DP-150	1 1/2"	35-19-54	3.80
G65DP-200	2"	35-19-55	5.00
G65DP-250	2 1/2"	35-19-56	8.40
G65DP-300	3"	35-19-57	8.20
G65DP-400	4"	35-19-58	13.40
G65DP-500	5"	35-19-59	28.00
G65DP-600	6"	35-19-60	29.40
G65DP-800	8"	35-19-61	146.80
G65DP-1000	10"		264.20

## JUMP SIZE CAM-LOCKS


Part No.	Cam size	Thread or shank size	PRICE EACH
<b>G65A... PART A FEMALE NPT ADAPTER</b>			
			
G65A-200-300	2"	3"	\$ 38.60
G65A-300-200	3"	2"	34.20
G65A-300-400	3"	4"	44.00
G65A-400-300	4"	3"	42.30

Part No.	Cam size	Thread or shank size	PRICE EACH
<b>G65D... PART D FEMALE NPT COUPLER</b>			
			
G65D-200-150	2"	1 1/2"	\$ 36.70
G65D-300-200	3"	2"	50.00
G65D-400-300	4"	3"	72.50

Part No.	Cam size	Thread or shank size	PRICE EACH
<b>G65B... PART B MALE NPT COUPLER</b>			
			
G65B-200-300	2"	3"	53.60
G65B-300-200	3"	2"	51.40
G65B-300-400	3"	4"	83.80
G65B-400-300	4"	3"	78.50

Part No.	Cam size	Thread or shank size	PRICE EACH
<b>G65E... PART E HOSE SHANK COUPLER</b>			
			
G65E-300-200	3"	2"	22.50
G65E-300-250	3"	2 1/2"	57.00
G65E-300-400	3"	4"	65.70
G65E-400-300	4"	3"	46.80

Part No.	Cam size	Thread or shank size	PRICE EACH
<b>G65C... PART C HOSE SHANK COUPLER</b>			
			
G65C-300-200	3"	2"	42.90
G65C-300-250	3"	2 1/2"	56.00
G65C-300-400	3"	4"	69.10
G65C-400-300	4"	3"	55.20

Part No.	Cam size	Thread or shank size	PRICE EACH
<b>G65F... PART F MALE NPT ADAPTER</b>			
			
G65F-200-300	2"	3"	41.90
G65F-300-200	3"	2"	42.80
G65F-300-400	3"	4"	52.10
G65F-400-300	4"	3"	50.70

**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.

## CAM-LOCKS FOR INTERLOCKING CRIMP FERRULES

G64 fittings feature a collar that, when used with G3F crimp ferrules, locks the coupling to the ferrule for extra fitting retention.


### G64C... CRIMP STYLE HOSE SHANK COUPLER

G64C-150	1½"	\$ 12.00
G64C-200	2"	14.10
G64C-300	3"	23.90
G64C-400	4"	31.60
G64C-600	6"	73.50



### G64E... CRIMP STYLE HOSE SHANK ADAPTER

G64E-150	1½"	6.30
G64E-200	2"	7.40
G64E-300	3"	15.70
G64E-400	4"	26.00
G64E-600	6"	60.20

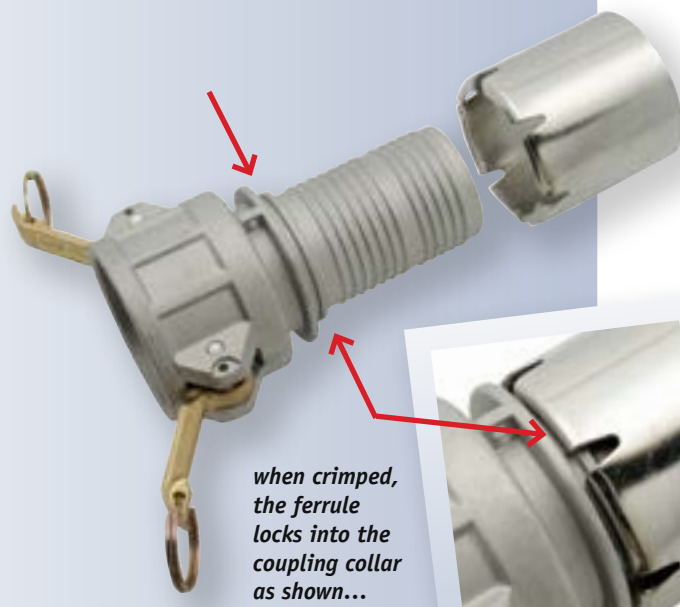

when crimped, the ferrule locks into the coupling collar as shown...

Part No.	Size	Size	PRICE EACH
----------	------	------	------------

### G65AA... ALUMINUM DOUBLE MALE ADAPTER

G65AA-150-150	1½"	1½"	19.90
G65AA-200-200	2"	2"	22.10
G65AA-300-200	3"	2"	28.50
G65AA-300-300	3"	3"	37.80
G65AA-400-300	4"	3"	41.30
G65AA-400-400	4"	4"	50.60
G65AA-600-400	6"	4"	85.90



Part No.	Size	Size	PRICE EACH
----------	------	------	------------

### G65CA90... ELBOW COUPLER

	Female Size	Male Size	
G65CA90-200	2"	2"	\$ 97.50
G65CA90-300	3"	3"	141.65
G65CA90-400	4"	4"	199.20
G65CA90-600	6"	6"	391.10




### G65CA... ALUMINUM REDUCER ADAPTER

	Female Size	Male Size	
G65CA-150-200	1½"	2"	37.30
G65CA-200-150	2"	1½"	37.30
G65CA-200-300	2"	3"	53.10
G65CA-200-400	2"	4"	71.40
G65CA-300-200	3"	2"	56.20
G65CA-300-400	3"	4"	80.00
G65CA-400-200	4"	2"	77.40
G65CA-400-300	4"	3"	77.60
G65CA-400-600	4"	6"	147.80
G65CA-600-300	6"	3"	157.80
G65CA-600-400	6"	4"	149.60



### G65DD... ALUMINUM DOUBLE FEMALE COUPLER

G65DD-200-200	2"	2"	60.50
G65DD-300-200	3"	2"	68.20
G65DD-300-300	3"	3"	81.90
G65DD-400-300	4"	3"	89.10
G65DD-400-400	4"	4"	93.10



**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.

# SPECIALTY ALUMINUM CAM-LOCKS

Part No.      Size      PRICE EACH

**G65AFL... FLANGE ADAPTER**

G65AFL-200	2"	\$ 86.40
G65AFL-300	3"	90.90
G65AFL-400	4"	126.50
G65AFL-600	6"	207.70



Part No.      Size      PRICE EACH

**G65DFL... FLANGE ADAPTER**



G65DFL-400	4"	\$ 185.40
------------	----	-----------



**G65DCL... LOCKABLE DUST CAP**

Arms can be secured with a pad-lock (lock not included)

G65DCL-150	1 1/2"	16.30
G65DCL-200	2"	18.60
G65DCL-300	3"	34.10
G65DCL-400	4"	40.20



**G66LB... RING STYLE LOCKING ARM MALE NPT COUPLER**

G66LB-200	2"	45.50
G66LB-300	3"	71.80
G66LB-400	4"	113.30



**G65LC... LOCKING ARM HOSE SHANK COUPLER**

G65LC-200	2"	52.50
G65LC-300	3"	77.70
G65LC-400	4"	102.30



**G66LC... RING STYLE LOCKING ARM HOSE SHANK COUPLER**

G66LC-200	2"	44.80
G66LC-300	3"	72.00
G66LC-400	4"	94.50



**G65LD... LOCKING ARM FEMALE NPT COUPLER**

G65LD-200	2"	50.30
G65LD-300	3"	75.40
G65LD-400	4"	104.20



**G66LD... RING STYLE LOCKING ARM FEMALE NPT COUPLER**

G66LD-200	2"	43.70
G66LD-300	3"	69.10
G66LD-400	4"	103.90



**G65LDC... LOCKING ARM DUST CAP**

G65LDC-200	2"	47.00
G65LDC-300	3"	63.00
G65LDC-400	4"	76.50



**G66LDC... RING STYLE LOCKING ARM DUST CAP**

G66LDC-200	2"	36.50
G66LDC-300	3"	48.10
G66LDC-400	4"	74.70



**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.



# NYLON CAM-LOCKS

Nylon and Polypropylene cam-locks are fibreglass reinforced for extra strength. They are often used where weight is a concern; for example on portable forest fire fighting equipment. All sizes come complete with stainless arms. The yellow nylon parts are favored for their strength, while black polypropylene is more economical, and suitable for a wider range of chemicals. Female couplers are supplied with locking clips. Nylon parts are shown here.

**\*WORKING PRESSURES AT 20°C:**

3/4" to 2"      100 psi  
3" & 4"      50 psi

\*As temperatures rise, working pressures for these cam-locks drops dramatically. At 93°C, pressure ratings are reduced by 50% for nylon and polypropylene fittings.

**Part No.      Size      PRICE EACH**

**G65NA NYLON PART A FEMALE NPT ADAPTER**

			
G65NA-100	1"		\$ 3.50
G65NA-150	1 1/2"		5.30
G65NA-200	2"		6.60
G65NA-300	3"		14.20
G65NA-400	4"		29.40

**G65NB... NYLON PART B MALE NPT COUPLER**

			
G65NB-100	1"		11.30
G65NB-150	1 1/2"		14.90
G65NB-200	2"		19.70
G65NB-300	3"		30.20
G65NB-400	4"		48.20

**G65NC... NYLON PART C HOSE SHANK COUPLER**

			
G65NC-100	1"		10.70
G65NC-150	1 1/2"		14.90
G65NC-200	2"		19.70
G65NC-300	3"		30.20
G65NC-400	4"		48.20

**G65ND... NYLON PART D FEMALE NPT COUPLER**

			
G65ND-100	1"		11.00
G65ND-150	1 1/2"		15.60
G65ND-200	2"		19.70
G65ND-300	3"		30.20
G65ND-400	4"		48.20

**Part No.      Size      PRICE EACH**

**G65NE... NYLON PART E HOSE SHANK ADAPTER**

			
G65NE-100	1"		\$ 4.20
G65NE-150	1 1/2"		6.00
G65NE-200	2"		8.30
G65NE-300	3"		15.80
G65NE-400	4"		26.40

**G65NF... NYLON PART F MALE NPT ADAPTER**

			
G65NF-100	1"		4.70
G65NF-150	1 1/2"		6.20
G65NF-200	2"		8.30
G65NF-300	3"		17.30
G65NF-400	4"		27.80

**G65NDC... NYLON PART DC DUST CAP**

			
G65NDC-100	1"		10.10
G65NDC-150	1 1/2"		14.10
G65NDC-200	2"		16.50
G65NDC-300	3"		27.30
G65NDC-400	4"		41.30

**G65NDP... NYLON PART DP DUST PLUG**

			
G65NDP-100	1"		3.50
G65NDP-150	1 1/2"		4.30
G65NDP-200	2"		5.60
G65NDP-300	3"		14.90
G65NDP-400	4"		21.70

**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.

# POLYPROPYLENE CAM-LOCKS

\*WORKING PRESSURES AT 20°C:

3/4" to 2"      100 psi  
 3" & 4"      50 psi

\*As temperatures rise, working pressures for these cam-locks drops dramatically. At 93°C, pressure ratings are reduced by 50% for nylon and polypropylene fittings.

**Part No.      Size      PRICE EACH**

**G65PA... POLYPROPYLENE PART A FEMALE NPT ADAPTER**

		
G65PA-075	3/4"	\$ 1.90
G65PA-100	1"	2.20
G65PA-125	1 1/4"	2.50
G65PA-150	1 1/2"	3.00
G65PA-200	2"	3.40
G65PA-300	3"	8.40
G65PA-400	4"	17.20

**G65PB... POLYPROPYLENE PART B MALE NPT COUPLER**

		
G65PB-075	3/4"	6.40
G65PB-100	1"	7.60
G65PB-125	1 1/4"	10.00
G65PB-150	1 1/2"	10.40
G65PB-200	2"	12.30
G65PB-300	3"	20.10
G65PB-400	4"	33.80

**G65PC... POLYPROPYLENE PART C HOSE SHANK COUPLER**

		
G65PC-075	3/4"	5.80
G65PC-100	1"	7.00
G65PC-125	1 1/4"	10.10
G65PC-150	1 1/2"	10.10
G65PC-200	2"	11.90
G65PC-300	3"	19.60
G65PC-400	4"	33.10

**G65PD... POLYPROPYLENE PART D FEMALE NPT COUPLER**

		
G65PD-075	3/4"	6.70
G65PD-100	1"	7.80
G65PD-125	1 1/4"	10.20
G65PD-150	1 1/2"	10.70
G65PD-200	2"	12.40
G65PD-300	3"	20.60
G65PD-400	4"	35.60

**Part No.      Size      PRICE EACH**

**G65PE... POLYPROPYLENE PART E HOSE SHANK ADAPTER**

		
G65PE-075	3/4"	\$ 2.30
G65PE-100	1"	2.30
G65PE-125	1 1/4"	2.50
G65PE-150	1 1/2"	3.00
G65PE-200	2"	4.10
G65PE-300	3"	8.40
G65PE-400	4"	15.60

**G65PF... POLYPROPYLENE PART F MALE NPT ADAPTER**

		
G65PF-075	3/4"	2.10
G65PF-100	1"	2.20
G65PF-125	1 1/4"	2.90
G65PF-150	1 1/2"	3.20
G65PF-200	2"	4.10
G65PF-300	3"	8.80
G65PF-400	4"	15.60

**G65PDC... POLYPROPYLENE PART DC DUST CAP**

		
G65PDC-075	3/4"	5.40
G65PDC-100	1"	7.00
G65PDC-125	1 1/4"	9.60
G65PDC-150	1 1/2"	9.90
G65PDC-200	2"	10.70
G65PDC-300	3"	17.60
G65PDC-400	4"	28.20

**G65PDP... POLYPROPYLENE PART DP DUST PLUG**

		
G65PDP-075	3/4"	1.90
G65PDP-100	1"	1.90
G65PDP-125	1 1/4"	2.50
G65PDP-150	1 1/2"	2.70
G65PDP-200	2"	2.90
G65PDP-300	3"	6.90
G65PDP-400	4"	11.10

**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.

# BRASS CAM-LOCKS


Brass cam-locks are used where the application requires corrosion resistance or extra strength. For example, they are popular in marine refueling where durability, salt water resistance, and non-sparking features are all important. G65BR couplings are manufactured from copper alloy grade 377 to the Commercial Item Description (CID) #A-A-59326B specification. Female couplers are supplied with locking clips.

### BRASS WORKING PRESSURES:


1/2" to 2"	250 psi
2-1/2" to 4"	150
5" & 6"	75
8"	50
Standard gaskets are rated to 105°C (221°F)	

### Part No. Size IMPA Code PRICE EACH

#### G65BRA... BRASS PART A FEMALE NPT ADAPTER

G65BRA-075	3/4"	35-17-16		\$ 9.90
G65BRA-100	1"	35-17-17		11.30
G65BRA-125	1 1/4"	35-17-18		14.80
G65BRA-150	1 1/2"	35-17-19		17.00
G65BRA-200	2"	35-17-20		21.90
G65BRA-250	2 1/2"	35-17-21		31.40
G65BRA-300	3"	35-17-22		38.50
G65BRA-400	4"	35-17-23		68.30
G65BRA-600	6"	35-17-25		133.70


#### G65BRB... BRASS PART B MALE NPT COUPLER

G65BRB-075	3/4"	35-18-66		19.00
G65BRB-100	1"	35-18-67		22.40
G65BRB-125	1 1/4"	35-18-68		30.60
G65BRB-150	1 1/2"	35-18-69		31.00
G65BRB-200	2"	35-18-70		34.80
G65BRB-250	2 1/2"	35-18-71		47.80
G65BRB-300	3"	35-18-72		61.30
G65BRB-400	4"	35-18-73		87.60
G65BRB-600	6"	35-18-75		193.10

#### G65BRC... BRASS PART C HOSE SHANK COUPLER


G65BRC-075	3/4"	35-20-15		16.50
G65BRC-100	1"	35-20-16		22.30
G65BRC-125	1 1/4"	35-20-17		25.10
G65BRC-150	1 1/2"	35-20-18		28.90
G65BRC-200	2"	35-20-19		37.10
G65BRC-250	2 1/2"	35-20-20		51.10
G65BRC-300	3"	35-20-21		65.60
G65BRC-400	4"	35-20-22		99.10
G65BRC-600	6"	35-20-24		255.00

#### G65BRD... BRASS PART D FEMALE NPT COUPLER

G65BRD-075	3/4"	35-18-16		19.30
G65BRD-100	1"	35-18-17		24.50
G65BRD-125	1 1/4"	35-18-18		27.50
G65BRD-150	1 1/2"	35-18-19		31.80
G65BRD-200	2"	35-18-20		36.40
G65BRD-250	2 1/2"	35-18-21		52.90
G65BRD-300	3"	35-18-22		64.00
G65BRD-400	4"	35-18-23		102.00
G65BRD-600	6"	35-18-25		237.70

### Number Size IMPA Code PRICE EACH

#### G65BRE... BRASS PART E HOSE SHANK ADAPTER

G65BRE-075	3/4"	35-19-15		\$ 11.40
G65BRE-100	1"	35-19-16		13.40
G65BRE-125	1 1/4"	35-19-17		16.90
G65BRE-150	1 1/2"	35-19-18		20.00
G65BRE-200	2"	35-19-19		30.00
G65BRE-250	2 1/2"	35-19-20		38.90
G65BRE-300	3"	35-19-21		55.00
G65BRE-400	4"	35-19-22		84.70
G65BRE-600	6"	35-19-24		233.20


#### G65BRF... BRASS PART F MALE NPT ADAPTER

G65BRF-075	3/4"	35-17-66		11.80
G65BRF-100	1"	35-17-67		14.50
G65BRF-125	1 1/4"	35-17-68		20.50
G65BRF-150	1 1/2"	35-17-69		21.90
G65BRF-200	2"	35-17-70		28.40
G65BRF-250	2 1/2"	35-17-71		45.30
G65BRF-300	3"	35-17-72		53.40
G65BRF-400	4"	35-17-73		94.70
G65BRF-600	6"	35-17-75		182.10

#### G65BRDC... BRASS PART DC DUST CAP

G65BRDC-075	3/4"	35-20-65		16.40
G65BRDC-100	1"	35-20-66		19.00
G65BRDC-125	1 1/4"	35-20-67		25.50
G65BRDC-150	1 1/2"	35-20-68		26.80
G65BRDC-200	2"	35-20-69		30.40
G65BRDC-250	2 1/2"	35-20-70		39.30
G65BRDC-300	3"	35-20-71		51.20
G65BRDC-400	4"	35-20-72		74.20
G65BRDC-600	6"	35-20-74		160.40

#### G65BRDP... BRASS PART DP DUST PLUG

G65BRDP-075	3/4"	35-19-65		10.40
G65BRDP-100	1"	35-19-66		11.90
G65BRDP-125	1 1/4"	35-19-67		14.20
G65BRDP-150	1 1/2"	35-19-68		13.80
G65BRDP-200	2"	35-19-69		18.20
G65BRDP-250	2 1/2"	35-19-70		26.00
G65BRDP-300	3"	35-19-71		29.40
G65BRDP-400	4"	35-19-72		46.60
G65BRDP-600	6"	35-19-74		125.80

**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.

# STAINLESS STEEL CAM-LOCKS

Our stainless couplings are manufactured from type 316 stainless for maximum corrosion resistance. Care is taken at the factory to ensure a smooth finish on wetted surfaces to minimize bacteria build-up in sanitary applications. Ductile iron cam-locks are not plated. Female couplers are supplied with locking clips.


## STAINLESS STEEL WORKING PRESSURES

3/4" to 2"	250 psi
2 1/2 to 4	150
6	100


Standard gaskets are rated to 105°C (221°F)

### Part No. Size IMPA Code PRICE EACH

#### G65SSA... STAINLESS STEEL PART A FEMALE NPT ADAPTER

G65SSA-075	3/4"	35-17-32		\$ 9.60
G65SSA-100	1"	35-17-33		12.50
G65SSA-125	1 1/4"	35-17-34		17.60
G65SSA-150	1 1/2"	35-17-35		20.70
G65SSA-200	2"	35-17-36		25.00
G65SSA-250	2 1/2"	35-17-37		44.80
G65SSA-300	3"	35-17-38	48.90	
G65SSA-400	4"	35-17-39	82.50	
G65SSA-600	6"	35-17-41	183.10	


#### G65SSB... STAINLESS STEEL PART B MALE NPT COUPLER

							
				G65SSB-075	3/4"	35-18-82	17.00
				G65SSB-100	1"	35-18-83	21.40
				G65SSB-125	1 1/4"	35-18-84	31.50
				G65SSB-150	1 1/2"	35-18-85	32.90
				G65SSB-200	2"	35-18-86	38.60
G65SSB-250	2 1/2"	35-18-87	62.90				
G65SSB-300	3"	35-18-88	71.40				
G65SSB-400	4"	35-18-89	100.80				
G65SSB-600	6"	35-18-91	254.50				

#### G65SSC... STAINLESS STEEL PART C HOSE SHANK COUPLER


							
				G65SSC-075	3/4"	35-20-31	16.10
				G65SSC-100	1"	35-20-32	20.70
				G65SSC-125	1 1/4"	35-20-33	30.50
				G65SSC-150	1 1/2"	35-20-34	32.10
				G65SSC-200	2"	35-20-35	44.80
G65SSC-250	2 1/2"	35-20-36	72.20				
G65SSC-300	3"	35-20-37	86.80				
G65SSC-400	4"	35-20-38	116.50				
G65SSC-600	6"	35-20-40	297.50				

#### G65SSD... STAINLESS STEEL PART D FEMALE NPT COUPLER

							
				G65SSD-075	3/4"	35-18-32	18.10
				G65SSD-100	1"	35-18-33	23.20
				G65SSD-125	1 1/4"	35-18-34	33.30
				G65SSD-150	1 1/2"	35-18-35	35.40
				G65SSD-200	2"	35-18-36	44.50
G65SSD-250	2 1/2"	35-18-37	67.30				
G65SSD-300	3"	35-18-38	80.50				
G65SSD-400	4"	35-18-39	114.10				
G65SSD-600	6"	35-18-41	272.30				

### Part No. Size IMPA Code PRICE EACH

#### G65SSE... STAINLESS STEEL PART E HOSE SHANK ADAPTER

G65SSE-075	3/4"	35-19-31		\$ 8.80
G65SSE-100	1"	35-19-32		14.10
G65SSE-125	1 1/4"	35-19-33		20.10
G65SSE-150	1 1/2"	35-19-34		25.40
G65SSE-200	2"	35-19-35		36.10
G65SSE-250	2 1/2"	35-19-36		62.40
G65SSE-300	3"	35-19-37	69.90	
G65SSE-400	4"	35-19-38	108.30	
G65SSE-600	6"	35-19-40	305.80	


#### G65SSF... STAINLESS STEEL PART F MALE NPT ADAPTER

							
				G65SSF-075	3/4"	35-17-82	12.30
				G65SSF-100	1"	35-17-83	15.50
				G65SSF-125	1 1/4"	35-17-84	25.50
				G65SSF-150	1 1/2"	35-17-85	28.50
				G65SSF-200	2"	35-17-86	35.90
G65SSF-250	2 1/2"	35-17-87	53.40				
G65SSF-300	3"	35-17-88	65.10				
G65SSF-400	4"	35-17-89	115.80				
G65SSF-600	6"	35-17-91	257.60				

#### G65SSDC... STAINLESS STEEL PART DC DUST CAP

							
				G65SSDC-075	3/4"	35-20-81	14.50
				G65SSDC-100	1"	35-20-82	18.60
				G65SSDC-125	1 1/4"	35-20-83	26.90
				G65SSDC-150	1 1/2"	35-20-84	26.90
				G65SSDC-200	2"	35-20-85	34.30
G65SSDC-250	2 1/2"	35-20-86	48.90				
G65SSDC-300	3"	35-20-87	58.60				
G65SSDC-400	4"	35-20-88	80.70				
G65SSDC-600	6"	35-20-90	239.30				

#### G65SSDP... STAINLESS STEEL PART DP DUST PLUG

							
				G65SSDP-075	3/4"	35-19-81	6.40
				G65SSDP-100	1"	35-19-82	8.80
				G65SSDP-125	1 1/4"	35-19-83	15.70
				G65SSDP-150	1 1/2"	35-19-84	15.50
				G65SSDP-200	2"	35-19-85	24.20
G65SSDP-250	2 1/2"	35-19-86	41.00				
G65SSDP-300	3"	35-19-87	41.80				
G65SSDP-400	4"	35-19-88	73.20				
G65SSDP-600	6"	35-19-90	162.70				

**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.



## CAM-LOCKS FOR INTERLOCKING CRIMP FERRULES

G64SS fittings feature a collar that, when used with G3F crimp ferrules, locks the coupling to the ferrule for extra fitting retention.

### G64SSC... CRIMP STYLE HOSE SHANK COUPLER

G64SSC-150	1½"	\$ 32.10
G64SSC-200	2"	44.80
G64SSC-300	3"	86.80
G64SSC-400	4"	116.50



when crimped,  
the ferrule  
locks into the  
coupling collar  
as shown...

### G64SSE... CRIMP STYLE HOSE SHANK COUPLER

G64SSE-150	1½"	25.40
G64SSE-200	2"	36.10
G64SSE-300	3"	69.90
G64SSE-400	4"	108.30



Part No.	Size	Size	PRICE EACH
----------	------	------	------------

### G65SSAA... STAINLESS STEEL DOUBLE MALE ADAPTER

G65SSAA-200-200	2"	2"	112.60
G65SSAA-300-200	3"	2"	138.00
G65SSAA-300-300	3"	3"	183.50
G65SSAA-400-300	4"	3"	237.80
G65SSAA-400-400	4"	4"	241.60



### G65SSDD... STAINLESS STEEL DOUBLE FEMALE ADAPTER

G65SSDD-200-200	2"	2"	142.10
G65SSDD-300-300	3"	3"	216.10
G65SSDD-400-400	4"	4"	318.20



### G65SSCA... STAINLESS STEEL REDUCER

	Female	Male	
G65SSCA-200-300	2"	3"	173.50
G65SSCA-300-200	3"	2"	179.50
G65SSCA-300-400	3"	4"	211.30
G65SSCA-400-300	4"	3"	257.60
G65SSCA-600-400	6"	4"	521.40



**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.

# STAINLESS STEEL LOCKING ARM CAM-LOCKS

# SAFETY BUMPS

Cam-locks & Fuel

Part No.                      Size                                      PRICE EACH

**G65SSLB... LOCKING ARM STAINLESS PART B MALE NPT COUPLER**

G65SSLB-150	1 1/2"	\$ 117.40
G65SSLB-200	2	129.90
G65SSLB-300	3	225.70
G65SSLB-400	4	341.10



**G65SSLC... LOCKING ARM STAINLESS PART C HOSE SHANK COUPLER**

G65SSLC-150	1 1/2"	108.50
G65SSLC-200	2	116.20
G65SSLC-300	3	210.20
G65SSLC-400	4	299.50



**G65SSLD... LOCKING ARM STAINLESS PART B FEMALE NPT COUPLER**

G65SSLD-150	1 1/2"	111.50
G65SSLD-200	2	122.50
G65SSLD-300	3	225.60
G65SSLD-400	4	312.70



**G65SSLDC... LOCKING ARM STAINLESS PART DC DUST CAP**

G65SSLDC-150	1 1/2"	99.20
G65SSLDC-200	2	115.20
G65SSLDC-300	3	150.80
G65SSLDC-400	4	203.90



Safety Bumps™ replace traditional cam and groove caps and plugs, providing a comfortable handle for the driver's hand and a "bump" that extends beyond the hose fittings and ears, protecting them from damage.

Safety Bumps™ are available in two, three and four inch, male and female models, in both hazardous and food grade configurations.

Safety Bumps™ are made from a glass-filled black composite with an antistatic additive. White food-grade certified fittings are available on special order, as are blue fittings for non-flammable products.

Standard black Safety Bumps™ are biodiesel and ethanol safe.

Part No.                      Size                                      PRICE EACH

**Safety Bump Dust Caps**

G65SBDC-200	2"	\$ 41.60
G65SBDC-300	3"	59.20
G65SBDC-400	4"	69.80



**Safety Bump Dust Plugs**

G65SBDP-200	2"	31.40
G65SBDP-300	3"	45.00
G65SBDP-400	4"	56.60



**Replacement Arms for Safety Bump Dust Caps**

G65SBY-200	Fits 2"	4.50
G65SBY-300	Fits 3" & 4"	5.50

Safety Locks™ are a companion product for the Safety Bump™ product line.

Safety Lock™ eliminates the chance for cam lock ears to open up during deliveries due to pulsing or vibration. Spills due to cam lock ears opening up have plagued the industry for years. Velcro straps tear and wear out against the edges of the ears and, like various other ear locking solutions, are difficult to use with gloved hands.

Safety Locks™ are made from a rugged material for long life and work with Green Line® standard female hose fittings with split rings.

It is recommended that Safety Locks™ be tethered to either the hose fitting split ring or to a Safety Bump™ to prevent loss and to allow the cable to be used to easily remove the Safety Lock™.

**Safety Locks**

G65SL-200	2"	6.60
G65SL-300	3"	7.90
G65SL-400	4"	10.00




**Safety Note:** Cam-locks should not be used with compressed air or other compressed gases.

Standard G65X Gaskets are made from buna-N (nitrile) rubber. We also stock common sizes of viton rubber gaskets as shown below for special chemical applications. Other sizes of viton gaskets as well as gaskets of other material are available on special order.

Temperature Range:	G65X	-35°C (-31°F) to 105°C (221°F)
	G65VX	-18°C (0°F) to 180°C (356°F)

Part No.	Size	PRICE EACH
----------	------	------------

### G65X... CAM-LOCK GASKET

G65X-050	1/2"	\$ 0.55	
G65X-075	3/4"	0.55	
G65X-100	1"	0.65	
G65X-125	1 1/4"	0.75	
G65X-150	1 1/2"	0.75	
G65X-200	2"	0.75	
G65X-250	2 1/2"	1.15	
G65X-300	3"	1.25	
G65X-400	4"	1.60	
G65X-500	5"	3.50	
G65X-600	6"	3.80	
G65X-800	8"	10.80	
G65X-1000	10"	17.70	


#### Extra Thick Gaskets:

G65THX-200	2"	2.20
G65THX-300	3"	2.90
G65THX-400	4"	3.60


#### Viton Gaskets:

G65VX-075	3/4"	6.60
G65VX-100	1"	7.60
G65VX-125	1 1/4"	9.40
G65VX-150	1 1/2"	12.00
G65VX-200	2"	15.10
G65VX-300	3"	21.30
G65VX-400	4"	32.80

### G65Y... BRASS CAM-ARM c/w finger ring & pin

G65Y-075	3/4"	2.10	
G65Y-100	1"	2.80	
G65Y-125	1 1/4" up to 2 1/2"	4.10	
G65Y-300	3" up to 5"	6.10	
G65Y-600	6"	12.70	
G65Y-800	8"	13.80	

### G65SSY... STAINLESS STEEL CAM-ARM c/w finger ring & pin

G65SSY-075	3/4"	2.90	
G65SSY-100	1"	3.90	
G65SSY-125	1 1/4" up to 2 1/2"	5.60	
G65SSY-300	3" up to 4"	8.70	
G65SSY-600	6"	28.10	


### G65LY... LOCKING CAM-ARM c/w finger ring, pin & lock-plate

G65LY-200	2"	32.30	
G65LY-300	3" up to 4"	36.70	


Note: G65Y LY Locking Arms can only be installed on G65L series couplers

Part No.	Size	PRICE EACH
----------	------	------------

### G65SC... CAM-LOCK SAFETY LOCK CLIP

G65SC	Safety clip	\$ 0.53	
G65SC-600	Safety clip for 6"	2.00	

### G65R... CAM-LOCK RING

G65R	Standard cam-lock ring	\$ 0.95	
------	------------------------	---------	---


### G65SSZ... SECURITY CHAIN WITH S-HOOKS

G65SSZx6	6" Stainless Steel	3.75	
G65SSZx12	12" Stainless Steel	5.40	

### G65VS... VELCRO ARM STRAPS

				
	<b>Diameter</b>	<b>Cam-lock Size</b>		
G65VS-200	2"-4"	1 1/2"-2 1/2"		7.10
G65VS-300	3 1/2"-6"	2 1/2"-4"		7.50
G65VS-400	4 1/2"-10"	4"-6"		9.80

### G65ST... ALUMINUM STRAINER

G65ST-200	2" NPT	27.70	
G65ST-300	3" NPT	41.90	
G65ST-400	4" NPT	55.10	

This strainer has 1/4" holes and threads into female NPT threads.

### G65SST... STAINLESS STRAINER

G65SST-200	2" NPT	61.40	
G65SST-300	3" NPT	79.50	
G65SST-400	4" NPT	132.50	

Hose I.D.      Part No.      Weight Each (lb.)      PRICE EACH

**COMPOSITE HOSE FITTINGS...**



**Carbon Steel Male NPT Inserts**

2"	G81-200	0.36	\$ 56.10
3	G81-300	0.73	70.90
4	G81-400	1.32	98.10
6	G81-600	11.44	252.50

**Type 304 Stainless Steel Male NPT Inserts\***

1 1/2"	G81SS-150	0.27	100.70
2"	G81SS-200	0.36	106.10
3	G81SS-300	0.73	193.50
4	G81SS-400	1.32	252.80
6	G81SS-600	11.44	634.80

**Turned Back Flange Nipple Insert\***

4	G81FL-400	4.84	189.60
6	G81FL-600	11.44	391.20



**Type 316 Stainless Turned Back Flange Nipple Insert\***

4	G81SSFL-400	4.84	370.20
6	G81SSFL-600	11.84	784.80

\*flanges not included



**Nitrile Sealing Gasket**

1 1/2"	G82-150	0.01	7.20
2	G82-200	0.01	7.70
3	G82-300	0.02	14.70
4	G82L-400	0.02	16.70
6	G82-600	0.44	53.00

**Carbon Steel Ferrules**

1 1/2"	G83-150	0.05	22.30
2	G83-200	0.10	25.90
3	G83-300	0.17	31.50
4	G83W-400	0.32	43.70
6	G83-600	8.14	280.70



Note: For composite hose support slings, see HB Hose Buns in the accessories section



# FUEL HOSE COUPLINGS

These low pressure couplings are designed for use with gravity feed or low pressure fuel dispensing hoses. The 3/4" & 1" sizes are made from diecast zinc with zinc dichromate plating. The 1 1/4" size is aluminum.

Part No.	Pipe Size	Hose Size	PRICE Loose	EACH Std Pkg	Pkg Qty
<b>G21Z... FARM TANK COUPLING</b>					
G21Z-075	3/4"	3/4"	\$ 4.20	\$ 3.70	5
G21Z-100	1"	1"	5.70	5.20	5
G33A-125	1 1/4"	1 1/4"		15.20	1



## CURB PUMP FITTINGS

G21CC crimp couplings are machined from brass & chrome plated. Ferrules are aluminum. Swivels have dual seals for long life.

Part No.	Pipe Size	Hose I.D.	Size O.D.	PRICE EACH
----------	-----------	-----------	-----------	------------

### G21CC... MALE NPT CRIMP CURB PUMP FITTING



G21CC-075-113	3/4"	3/4"	1.13"	14.10
G21CC-100-150	1"	1"	1.50"	24.00

### G21CCLM... LIVE MALE NPT SWIVEL CRIMP CURB PUMP FITTING



G21CCLM-075-113	3/4"	3/4"	1.13"	23.50
G21CCLM-100-150	1"	1"	1.50"	34.30

G21C couplings are machined from brass and then chrome plated. Reusable couplings can be installed with wrenches but permanent fittings are installed using a Scovil style internal expansion machine.

Part No.	Pipe Size	Hose I.D.	Size O.D.	PRICE EACH
----------	-----------	-----------	-----------	------------

### G21C... PERMANENT CURB PUMP FITTING



G21C-075-113	3/4"	3/4"	1.13"	14.10
G21C-100-150	1"	1"	1.50"	26.80

### G21CRLM... LIVE SWIVEL REUSABLE CURB PUMP FITTING



G21CRLM-075-113	3/4"	3/4"	1.13"	27.50
G21CRLM-075-125	3/4"	3/4"	1.25"	44.50
G21CRLM-100-150	1"	1"	1.50"	71.20

## INTERNAL EXPANSION COUPLINGS

Internal expansion couplings are manufactured from solid brass forgings. Ferrules are cold-drawn copper alloy. These couplings can only be installed using a Scovil type internal expansion machine. Internal expansion couplings are most commonly found in home fuel oil or marine refueling applications.

Part No.	Pipe Size	Hose Size	PRICE EACH
----------	-----------	-----------	------------

### G61... BRASS MALE NPT

G61-075	3/4"	3/4"	\$ 35.50
G61-100	1"	1"	35.50
G61-125	1 1/4"	1 1/4"	37.20
G61-138	1 1/2"	1 3/8"	52.50
G61-150	1 1/2"	1 1/2"	45.80



G61-200	2"	2"	83.60
---------	----	----	-------

### G62... BRASS FEMALE NPSM

G62-075	3/4"	3/4"	67.30
G62-100	1"	1"	67.60
G62-125	1 1/4"	1 1/4"	69.20
G62-138	1 1/2"	1 3/8"	74.90
G62-150	1 1/2"	1 1/2"	87.50



G62-200	2"	2"	123.00
---------	----	----	--------

### G63... FERRULES

	Hose I.D.	
G63-075	3/4"	14.20
G63-100	1"	13.50
G63-125	1 1/4"	16.30
G63-138	1 3/8"	24.50
G63-150	1 1/2"	20.70



G63-200	2"	32.20
---------	----	-------

Specify ferrule letter designation from chart below to match hose O.D.


Hose I.D.	Hose O.D. and Ferrule Designation						
	AAA	AA	A	B	C	D	E
3/4"	1.17"	1.22"	1.27"	1.32"	1.37"		
1"	1.47	1.51	1.55	1.60	1.64	1.69	
1 1/4"	1.69	1.75	1.80	1.86	1.91	1.97	
1 3/8"			1.80	1.86	1.91	1.97	
1 1/2"	1.90	1.97	2.04	2.10	2.16	2.22	2.29
2"	2.46	2.53	2.59	2.66	2.72	2.79	

All curb pump fittings should be grounded to the wire reinforcement of the hose using a staple or pin during assembly. Correct matching of hose outside diameter to the coupling is necessary to ensure good coupling retention. Crimp fittings must be installed according to factory instructions.

Utility nozzles are suitable for gravity feed or 12 volt utility pumps only. Please note that automotive filler necks on newer (unleaded gas) vehicles will only accept the 3/4" spout. The large capacity 1-1/4 nozzle is generally used for diesel service and is rated to 25 psi maximum.

### G67... UTILITY NOZZLES


G67-075-100 3/4" 1" NPT Basic Nozzle \$ 42.50

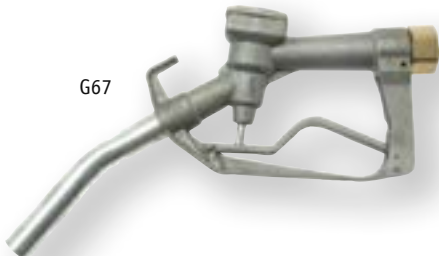

G67


Note: Several of our utility nozzles previously carried a UL listing. Recently UL has changed some of the requirements that the nozzles must meet. The design changes required are cost prohibitive and so G67 products previously listed as G67UL are now listed as G67P. For customers requiring a UL listed nozzle, please see our G69 nozzles listed on the next page.

G67P-075-100 3/4" 1" 900W34S Premium with straight spout 63.00  
 G67P-100-100 1" 1" 900S Premium with straight spout 61.10

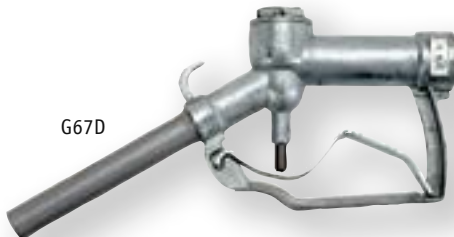

G67D

G67PB-075-100 3/4" 1" 900W34B Premium with bent spout 67.80  
 G67PB-100-100 1" 1" 900B Premium with bent spout 63.00

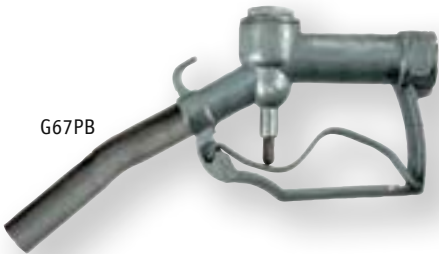

G67PB

G67-125-125 1 1/4" 1 1/4" 1250-94 Low pressure bulk nozzle 193.60



G67

G68 nozzles are designed for manual operation (no automatic shut-off) and are generally used for bulk oil delivery. G68A nozzles are used in card lock or industrial truck refueling stations and feature venturi type automatic shut-offs. Both series are aluminum construction with a bronze trigger and handle high pressures and flows up to 300 litres per minute. Please note that a minimum of 29 litres per minute of flow is required for the automatic shut-off to function. When supplied with a break-away spout, this nozzle meets UL/ULC requirements.

Part No.	Spout Size	Thread Size	Cross Reference	Description	PRICE EACH
----------	------------	-------------	-----------------	-------------	------------

### G68... BULK DELIVERY NOZZLES

G68-125	1 1/4"	1 1/4" NPT	114D	Bulk delivery nozzle	\$ 477.20
G68-150	1 1/2"	1 1/2"	112D	Bulk delivery nozzle	477.20
G68A-150	1 1/2"	1 1/2"	1124D	Automatic shut off nozzle	771.80



G68A

G68AUL-150 1 1/2" 1 1/2" AN150 UL/ULC Automatic shut off nozzle 813.40



G68AUL

The variety of fuel nozzles now available is quite staggering. Not only are there several brands with varying features, there are also several competing designs of vapor recovery systems in place in different geographic locations. Such vapor recovery systems include varying types of balance systems and vacuum assist systems that require the nozzle to be matched with the pumping and recovery system. Generally these products are supplied by the petroleum equipment distributors that service the pump equipment. Here we offer a limited range of the Husky conventional fueling nozzles, most often found in commercial and industrial dispensing applications.

**Note:** Due to changes in the National Fire Prevention Code, we can no longer sell nozzles with hold open clips unless they are pressure activated. This means that nozzles with hold open clips will not work on gravity feed systems. The pressure from the pump opens a check valve allowing the fuel to flow. All of the G69 nozzles shown are automatic shut-off and are ULC approved. Pressure activated nozzles require a minimum line pressure of 17 psi to activate flow.



3/4" Nozzle



1" Nozzle

Part Number	Cross Reference	Fuel	Thread Size	Hold Open Clip	Grip Color	PRICE EACH
<b>Nozzles without hold open clips (not pressure activated)</b>						
G69ULC-075-B	159408-04	unleaded gas	3/4" NPT	no	black	135.10
G69ULC-075-R	159408-02	unleaded gas	3/4"	no	red	135.10
G69ULC-100-B	173312-04	diesel or gas	1	no	black	251.90
G69ULC-100-R	173312-02	diesel or gas	1	no	red	251.90
G69ULC-100-Y	173312-05	diesel or gas	1	no	yellow*	251.90
<b>Nozzles with hold open clips (pressure activated)</b>						
G69PA-075-B	159504-04	unleaded gas	3/4" NPT	yes	black	146.00
G69PA-075-R	159504-02	unleaded gas	3/4"	yes	red	146.00
G69PA-100-B	177610-04	diesel or gas	1	yes	black	277.80
G69PA-100-R	177610-02	diesel or gas	1	yes	red	277.80
G69PA-100-Y	177610-05	diesel or gas	1	yes	yellow*	277.80

G69SG



Part Number	Cross Reference	Description	Grip Color	PRICE EACH
G69SG-B	1808-04	splash guard	black	8.60
G69SG-R	1808-02	splash guard	red	8.60
G69SG-Y	1808-05	splash guard	yellow*	8.60

G69HW



Part Number	Cross Reference	Description	Grip Color	PRICE EACH
G69HW-075-B	4145-04	hand warmer	black	12.50
G69HW-075-R	4145-02	hand warmer	red	12.50
G69HW-100-B	4740-04	hand warmer	black	16.90
G69HW-100-R	4740-02	hand warmer	red	16.90
G69HW-100-Y	4740-05	hand warmer	yellow*	16.90

\*Note: Yellow typically designates diesel service

### G0808BV... BREAKAWAY VALVES



G0808BV



G0808BVR

Part Number	Cross Reference	Pipe Size	Description	PRICE EACH
G0808BV-075-075	2273	3/4"	Single use valve	73.10
G0808BVR-075-075	3360	3/4"	Re-connectable valve	156.90
G0808BVR-100-100	2276	1	Re-connectable valve	231.10

**Husky Nozzle Features:**

- UL/ULC listed.
- automatically shuts off when gas tank is full.
- nozzle shuts off if it raises above horizontal or falls from the filler neck.
- $\frac{3}{4}$ " nozzle is regulated to 43 litres per minute (10 U.S. GPM) maximum.
- 1" nozzle is for high volume with flow rates up to 325 litres per minute (75 U.S.GPM).
- smooth grip guards included (other colors are available - specify at time of ordering)
- optional splash guards available in various colors.

The 2000L and 2500L are automatic pressure and vacuum relief caps for farm and industrial fuel storage tanks. The normally closed relief valve prevents fuel evaporation and dust contamination. It vents at 2psi pressure or 0.7"Hg vacuum. The body has an NPS male threaded body with a lockable cap (padlock not included).

Part No.	Pipe Size/Material	Cross Reference	PRICE EACH
<b>FUEL HOSE SWIVELS</b>			
G1608XA-075	$\frac{3}{4}$ " Aluminum/zinc	36S-5080	\$ 48.70
G1608XA-100	1" Aluminum/zinc	36S-5090	75.80



G1608XAU-075	360°- $\frac{3}{4}$ " Aluminum/zinc		\$ 58.30
G1608XAU-100	360°- 1" Aluminum/zinc		109.70



G1608XA-125	$1\frac{1}{4}$ " Aluminum	SWMF-125	\$ 210.90
G1608XA-150	$1\frac{1}{2}$ " Aluminum	SWMF-150	227.90



Part No.	Description	PRICE EACH
----------	-------------	------------

**LOCKING VENT CAP**



2000L	2" Locking Vent Cap	\$ 60.40
2500L	$2\frac{1}{2}$ " Locking Vent Cap	60.40

The lockable cap rotates to control gravity flow from above ground storage tanks. (Padlock not included)

**LOCKABLE ANGLE VALVES**



500AV	1" NPT Valve	\$ 100.20
525AV	$1\frac{1}{4}$ " NPT Valve	114.10